


### PBT-400 Positioner

#### Features:

- 400 lb. capacity in the horizontal and vertical position.
- Variable speed rotation from .37 to 13.0 RPM.
- Manual tilt from 0 to 105° in 15° increments, with pin lock.
- Heavy duty rotation gear and motor insure smooth movement.
- High quality worm gear reducers for smooth operation.
- Solid state controls with dynamic braking on the rotation drives.
- 8" diameter 3-Jaw self-centering chuck.
- 2.5" through hole to allow for back purge when welding pipe or tube.



- High frequency protected.
- Minimal backlash.
- Includes foot pedal
- All aluminum frame - only weighs 105 lbs.

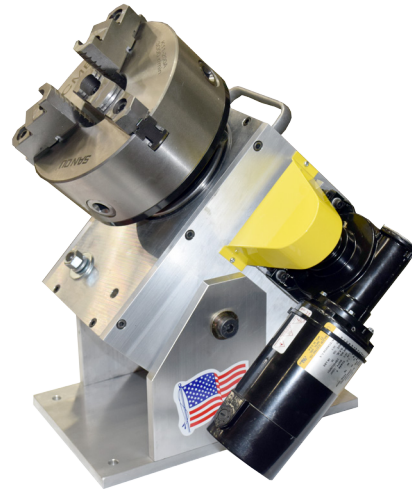

4790 River Road Cincinnati, OH 45233

Toll Free: 800-288-9414

Phone: 513-535-0333 Fax: 513-467-3585

[www.sigmatouchweld.com](http://www.sigmatouchweld.com)